

1007834

MODEL SHORT S10 CUSTOMER DRAWING

A
B
C
D
E
F
G
H
I

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15

STATOR SOLDER TERMINALS


ROTOR SOLDER TERMINALS

2X EQUALLY SPACED
4-40 CLEARANCE HOLES
ON ϕ 1.435 [36.45] B.C.

MICHIGAN
SCIENTIFIC

Milford, Michigan
Type S

TABS TO ATTACH STATOR RESTRAINT.
USE A FLEXIBLE CABLE OR SOFT SPRING AS A STATOR RESTRAINT.
DO NOT USE THE STATOR CABLE.
UNIT TORQUE IS APPROXIMATELY 3 OZ-IN [.02 N-M].

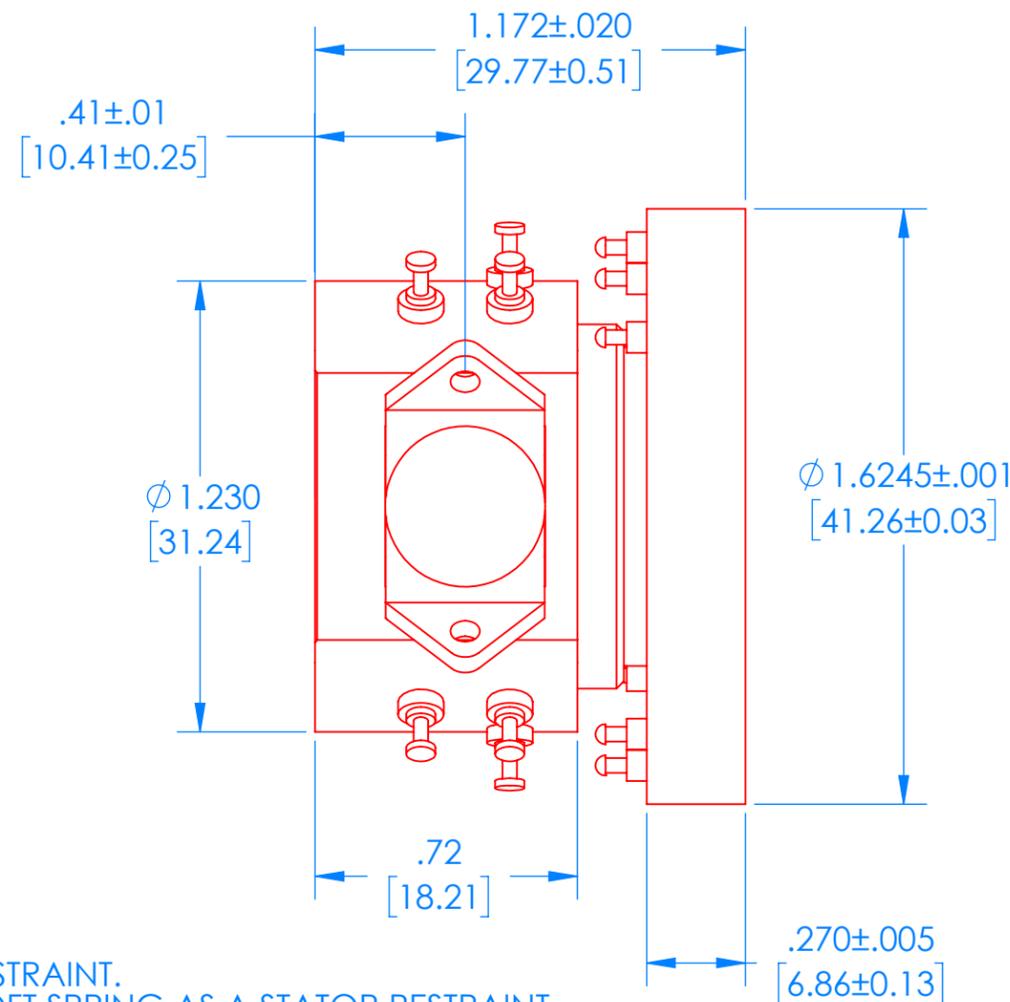

DIMENSIONS ARE IN [mm] in

UNLESS OTHERWISE SPECIFIED:		MICHIGAN SCIENTIFIC CORPORATION	
DIMENSIONS ARE IN INCHES		8500 ANCE ROAD	
TOLERANCES:		CHARLEVOIX, MICHIGAN 49720	
.XXXX ±.0010		www.michsci.com	
.XXX ±.005		PRODUCT LINE:	
.XX ±.01		CUSTOMER CODE: PROJECT CODE:	
FRACTIONAL ±		DESCRIPTION: SHORT S10 CUSTOMER MODEL	
ANGULAR: MACH ±		SIZE DWG. NO. REV	
BEND ±		B 1007834 A	
WEIGHT		SCALE: 2:1 SHEET 1 OF 1	
MATERIAL			
FINISH			

Details and specifications provided in this document are purely for informational purposes and are subject to alterations. No liability is accepted for errors or omissions. ©2020 Michigan Scientific Corporation